

ABAYA

code	width mm	height mm	projection mm	tappings c/c mm	outputs to EN442	
					Btu/hr Δ 50°C	watts Δ 50°C
CAD1	600	990	86-98	50	931	273*
CAD2	600	1800	86-98	50	1454	426

Dual fuel factory fitted. Wall fixed 1/2" tappings facing down. Suitable for any hot water system.
*Approx output - NPD.

ABUNA

code	width mm	height mm	no. of tubes	projection mm	tappings c/c mm	outputs to EN442	
						Btu/hr Δ 50°C	watts Δ 50°C
SON1	164	1800	4	86-98	70	616	180
SON2	236	1800	6	86-98	145	886	260
SON3	308	1800	8	86-98	215	1156	339
SON4	380	1800	10	86-98	290	1426	418

Dual fuel factory fitted. Wall fixed 1/2" tappings facing down. Suitable for any hot water system.
Towel rail accessories can be purchased for this product.

ANGARA

code	width mm	height mm	projection mm	tappings wall to centre mm	width c/c vertical tubes mm	tappings c/c mm	optional additional towel rail	outputs to EN442	
								Btu/hr Δ 50°C	watts Δ 50°C
MRR1/45	450	760	86-98	70-82	418	418	MRAC45	1208	354
MRR1	500	760	86-98	70-82	468	468	MRAC1	1344	394
MRR2	600	760	86-98	70-82	568	568	MRAC2	1613	473
MRR3	750	760	86-98	70-82	718	718	MRAC3	2016	591
MRR4/45	450	1190	86-98	70-82	418	418	MRAC45	1910	560
MRR4	500	1190	86-98	70-82	468	468	MRAC1	2122	622
MRR5	600	1190	86-98	70-82	568	568	MRAC2	2549	747
MRR6	750	1190	86-98	70-82	718	718	MRAC3	3183	933
MRR7/45	450	1800	86-98	70-82	418	418	MRAC45	2882	845
MRR7	500	1800	86-98	70-82	468	468	MRAC1	3200	938
MRR8	600	1800	86-98	70-82	568	568	MRAC2	3843	1126
MRR9	750	1800	86-98	70-82	718	718	MRAC3	4804	1408

Tube size: Frame = 31.75mm; cross tubes = 25.4mm. Sealed electric, code becomes ERR plus size.
Wall fixed, 1/2" tappings. Painted units suitable for closed circuit applications only. Plated units suitable for any hot water system.
Chrome outputs reduce by approximately 35%. Actuals available on request.

AVONMORE Curved


code	width mm	height mm	projection mm	tappings c/c mm	outputs to EN442	
					Btu/hr Δ 50°C	watts Δ 50°C
ECOC85	490	862	80-100	445	1436	421
ECOC86	590	862	80-100	545	1686	494
ECOC125	490	1222	80-100	445	2003	587
ECOC126	590	1222	80-100	545	2351	689
ECOC185	490	1807	80-100	445	2941	862
ECOC186	590	1807	80-100	545	3487	1022

Heater kit option ECO450. Sealed electric, add E to code. Wall fixed, 1/2" tappings. Closed circuit applications only.

AVONMORE Straight

code	width mm	height mm	projection mm	tappings c/c mm	outputs to EN442	
					Btu/hr Δ 50°C	watts Δ 50°C
ECOS85	500	862	89-109	450	1423	417
ECOS86	600	862	89-109	550	1662	487
ECOS125	500	1222	89-109	450	1965	576
ECOS126	600	1222	89-109	550	2307	676
ECOS185	500	1807	89-109	450	2955	866
ECOS186	600	1807	89-109	550	3460	1014

Heater kit option ECO450. Sealed electric, add E to code. Wall fixed, 1/2" tappings. Closed circuit applications only.

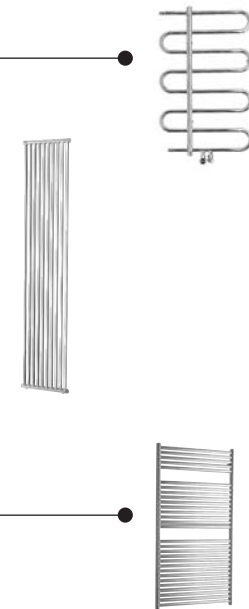

HEATER KIT

size	heater kit ref white	heater kit ref chrome
1/45 to 3	MHK300	MHK200
4/45 to 6	MHK300	MHK200
7/45 to 9	MHK500	MHK500

